

# Flex™ DE

360° LED SIGN TUBE



# DOUBLE-SIDED SIGN LIGHT

## PRODUCT FEATURES & BENEFITS

- Double-sided design sign light
- 360° beam angle
- Rotatable end caps
- Internal driver
- UL for safety
- No UV, no mercury
- High CRI
- 5 year warranty
- Instant on, no delay or
- Convenient and quick installation
- Input from both ends
- Utilizes R17d sockets
- Compatible with sensors
- Works in cold temperature applications
- Plastic tube is shatterproof



Internal Driver  
Double End Input



# Flex™ DE

Internal Driver LED Lamp


Model No.	Length	Base Type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD
LS48T8HO/840/21P-ID DE	48	R17d	21	120-277	4000K	2500	80	360	120	.09	<20%
LS48T8HO/865/21P-ID DE	48	R17d	21	120-277	6500K	2500	80	360	120	.09	<20%
LS60T8HO/840/25P-ID DE	60	R17d	25	120-277	4000K	3125	80	360	125	.09	<20%
LS60T8HO/865/25P-ID DE	60	R17d	25	120-277	6500K	3125	80	360	125	.09	<20%
LS72T8HO/840/32P-ID DE	72	R17d	32	120-277	4000K	3750	80	360	117	.09	<20%
LS72T8HO/865/32P-ID DE	72	R17d	32	120-277	6500K	3750	80	360	117	.09	<20%
LS96T8HO/840/42P-ID DE	96	R17d	42	120-277	4000K	5000	80	360	120	.09	<20%
LS96T8HO/865/42P-ID DE	96	R17d	42	120-277	6500K	5000	80	360	120	.09	<20%

## Ordering Information

EXAMPLE: LS48T8HO/840/21G-ID DE

<b>L</b>	<b>S</b>	<b>48</b>	<b>T8</b>	<b>HO</b>	<b>8</b>	<b>40</b>	<b>21 P</b>	<b>ID</b>	<b>DE</b>
Manufacturer's Code	Sign Light Double-sided Design	Normal Length 48=48"	Lamp Shape T8=T8	HO Application R17d Base =>80	CRI 8 =>80	CCT 40 =4000K	Wattage 21G-21W	Internal Driver	Double End Input

## Wiring diagram

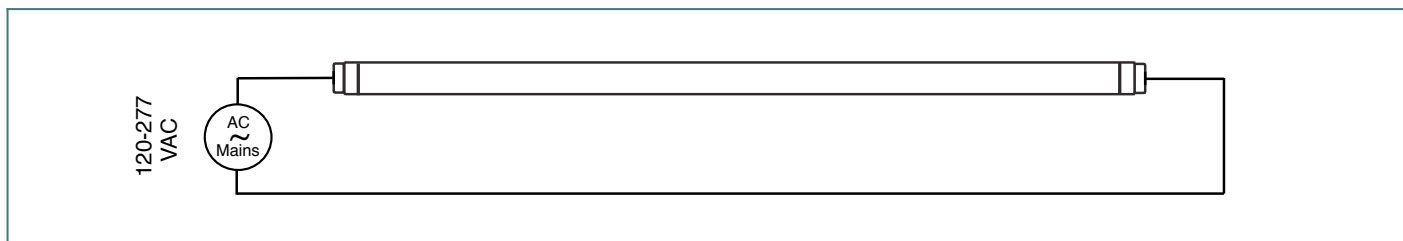

(866) 933.7736 | [info@espentech.com](mailto:info@espentech.com)

Technical specifications subject to change without notice.