

VersaDim RF Flex Linear T8

L48T8/8XX/12P-ID DE RF

Commercial Grade LED T8 Lamp with Wireless Control



Descriptions:

The Flex (Type B) lamps are designed to be the perfect retrofit solution to move from traditional fluorescent lamps to energy saving LEDs. This ballast bypass lamp has everything needed built into the lamp with proven energy savings, long life, surge suppression and industry leading safety features. The double ended lamp has power to each end with existing shunted or unshunted sockets. Wireless control eliminates rewiring of control wires. Nano plastic tube qualifies any NSF 2 applications without breakage.



Features & Benefits:

- Shatterproof Nano Plastic Tube
- versaDim RF 2.4GHz Remote Control System compatible
- Easy Pairing and controlling with versaDim RF remote
- Max. 25ft control distance from versaDim RF remote or RF lamp
- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Input from Both Ends
- Utilizes shunted or unshunted G13 sockets
- NSF 2 rated with high performance nano plastic series
- Works in cold temperature applications
- 5 Year Warranty

Specifications:

Ordering Code	Length (in)	Lamp Base	Lamp Wattage	Input Voltage	CCT (K)	Initial Lumens	CRI	Beam Angle	System Efficacy	Power Factor	THD
L48T8/830/12P-ID DE RF	48	G13	12	120-277	3000K	1700	80	210	142	0.9	<20%
L48T8/835/12P-ID DE RF	48	G13	12	120-277	3500K	1700	80	210	142	0.9	<20%
L48T8/840/12P-ID DE RF	48	G13	12	120-277	4000K	1800	80	210	150	0.9	<20%
L48T8/850/12P-ID DE RF	48	G13	12	120-277	5000K	1800	80	210	150	0.9	<20%

Wiring Diagram:

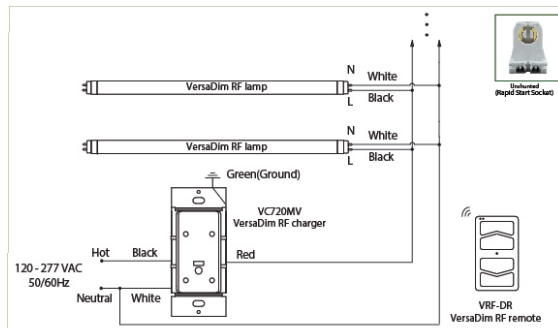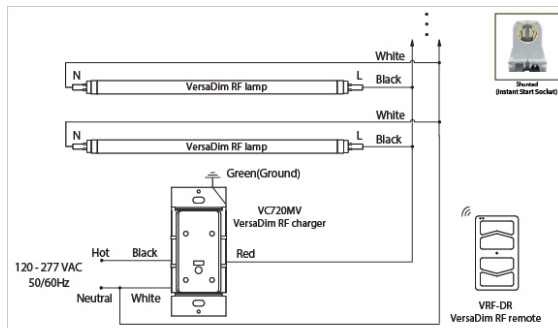

DLC Listing:

Ordering Code	DLC Product ID	DLC Product Model	DLC Version
L48T8/830/12P-ID DE RF	P4RAUPJ4	L48T8/830/12P-ID DE RF	5.1
L48T8/835/12P-ID DE RF	P2YFYSDY	L48T8/835/12P-ID DE RF	5.1
L48T8/840/12P-ID DE RF	PZLQH2JO	L48T8/840/12P-ID DE RF	5.1
L48T8/850/12P-ID DE RF	PHJFCT0D	L48T8/850/12P-ID DE RF	5.1

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

