

Single End Flex Lamp

Commercial Grade LED T8 Lamp



Features & Benefits


- High performance plastic series
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Works in cold temperature applications
- Compatible with controls and sensors
- Glass tube for superior optical performance
- 5 Year Warranty

* EMERGENCY BALLAST RESTRICTIONS

Specification

Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life
LB48T8U6/830/13P-AB BAA/TAA	24	120-277V	13	16	3000K	1800	83	240	138	112	50000
LB48T8U6/835/13P-AB BAA/TAA	24	120-277V	13	16	3500K	1800	83	240	138	112	50000
LB48T8U6/840/13P-AB BAA/TAA	24	120-277V	13	16	4000K	1900	83	240	146	118	50000
LB48T8U6/850/13P-AB BAA/TAA	24	120-277V	13	16	5000K	2000	83	240	153	125	50000

Wiring Diagram

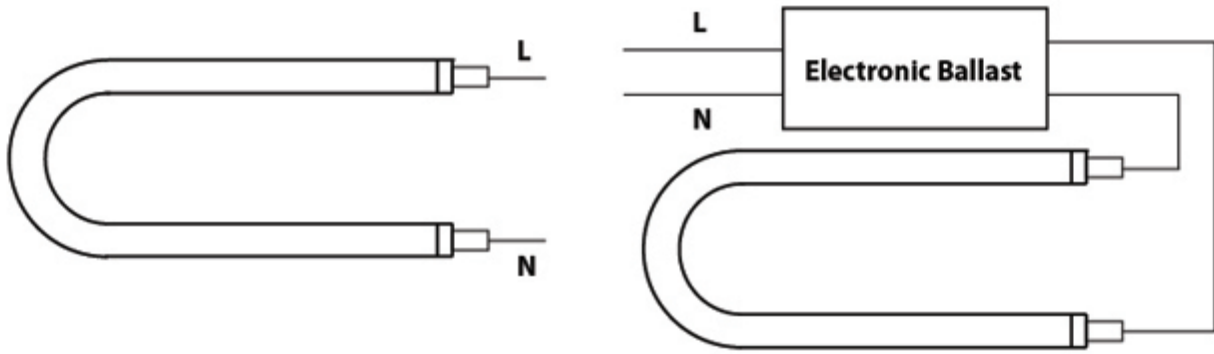

Dlc Information

Order Code	DLC Product ID	DLC Product Model	DLC Version
LB48T8U6/830/13P-AB BAA/TAA	PEF9RQ9F	LB48T8U6/830/13P-AB (-aa)	5.1
LB48T8U6/835/13P-AB BAA/TAA	P2L49SR2	LB48T8U6/835/13P-AB (-aa)	5.1
LB48T8U6/840/13P-AB BAA/TAA	PW1K9JDF	LB48T8U6/840/13P-AB (-aa)	5.1
LB48T8U6/850/13P-AB BAA/TAA	PYF74YVR	LB48T8U6/850/13P-AB (-aa)	5.1