

# VersaKit Linear Retrofit Kit

## VEKM-L23C/830

### Commercial Grade LED Retrofit Kit



#### Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


#### Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015


#### Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L23C/830	3 lamp, 2ft 3000K	Low Wattage	D547-3M-302 C/830	24	3500	145.83333333333333	3000	83	120-277V	3	VLM2409C/830	VPL100-4C	<20%
VEKM-L23C/830	3 lamp, 2ft 3000K	Normal Wattage	D547-3M-302 C/830	29	4250	146.551724137931	3000	83	120-277V	3	VLM2409C/830	VPL100-4C	<20%
VEKM-L23C/830	3 lamp, 2ft 3000K	High Wattage	D547-3M-302 C/830	34	4925	144.8529411764706	3000	83	120-277V	3	VLM2409C/830	VPL100-4C	<20%
VEKM-L23C/830	3 lamp, 2ft 3000K	Low Wattage	D547-3M-302 C/830	23	3000	130	3000	83	3	VLM2409C/830	VPL100-4C	<20%	
VEKM-L23C/830	3 lamp, 2ft 3000K	Normal Wattage	D547-3M-302 C/830	28	3600	129	3000	83	3	VLM2409C/830	VPL100-4C	<20%	
VEKM-L23C/830	3 lamp, 2ft 3000K	High Wattage	D547-3M-302 C/830	34	4300	126	3000	83	3	VLM2409C/830	VPL100-4C	<20%	


**Module Dimensions:**



**Driver Dimensions:**

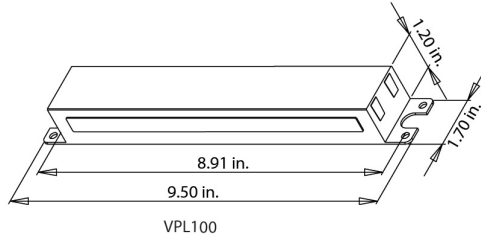

**Wiring Diagram:**

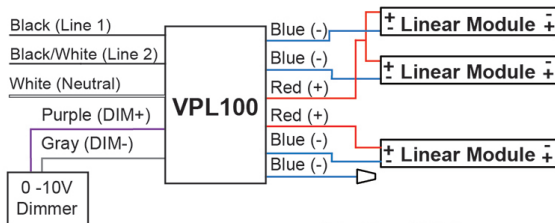

Output Current Selection

Input Line	Output Current
L1 (BLK)	300mA
L2 (BLK/WHT)	250mA
L1 + L2	360mA

**DLC Listing:**

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L23C/830	D547-3M-302 C/830	Low Wattage	N/A	N/A	N/A
VEKM-L23C/830	D547-3M-302 C/830	Normal Wattage	N/A	N/A	N/A
VEKM-L23C/830	D547-3M-302 C/830	High Wattage	N/A	N/A	N/A
VEKM-L23C/830	D547-3M-302 C/830	Low Wattage	N/A	N/A	N/A
VEKM-L23C/830	D547-3M-302 C/830	Normal Wattage	N/A	N/A	N/A
VEKM-L23C/830	D547-3M-302 C/830	High Wattage	N/A	N/A	N/A

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.