

VersaKit Linear Retrofit Kit

VEKM-L31C/840

Commercial Grade LED Retrofit Kit



Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015

Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L31C/840	1 lamp, 3ft 4000K	Low Wattage	D546-1M-303 C/840	11.5	1700	147.8260869565217	4000	83	120-277V	1	VLM3611C/840	VPL50-2C	<20%
VEKM-L31C/840	1 lamp, 3ft 4000K	Normal Wattage	D546-1M-303 C/840	13.5	2000	148.1481481481482	4000	83	120-277V	1	VLM3611C/840	VPL50-2C	<20%
VEKM-L31C/840	1 lamp, 3ft 4000K	High Wattage	D546-1M-303 C/840	16	2300	143.75	4000	83	120-277V	1	VLM3611C/840	VPL50-2C	<20%
VEKM-L31C/840	1 lamp, 3ft 4000K	Low Wattage	D546-1M-303 C/840	10.5	1460	139	4000	83	1	VLM3611C/840	VPL50-2C	<20%	
VEKM-L31C/840	1 lamp, 3ft 4000K	Normal Wattage	D546-1M-303 C/840	13	1750	135	4000	83	1	VLM3611C/840	VPL50-2C	<20%	
VEKM-L31C/840	1 lamp, 3ft 4000K	High Wattage	D546-1M-303 C/840	16	2100	131	4000	83	1	VLM3611C/840	VPL50-2C	<20%	


Module Dimensions:



Driver Dimensions:



Wiring Diagram:

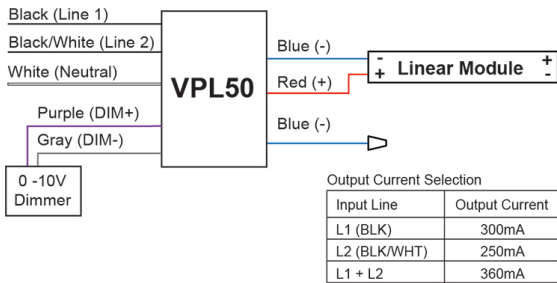

DLC Listing:

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L31C/840	D546-1M-303 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L31C/840	D546-1M-303 C/840	Normal Wattage	N/A	N/A	N/A
VEKM-L31C/840	D546-1M-303 C/840	High Wattage	N/A	N/A	N/A
VEKM-L31C/840	D546-1M-303 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L31C/840	D546-1M-303 C/840	Normal Wattage	N/A	N/A	N/A
VEKM-L31C/840	D546-1M-303 C/840	High Wattage	N/A	N/A	N/A

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.