

VersaKit Linear Retrofit Kit

VEKM-L33C/850

Commercial Grade LED Retrofit Kit



Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015


Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L33C/850	3 lamp, 3ft 5000K	Low Wattage	D547-3M-303 C/850	33.5	5050	150.7462686567164	5000	83	120-277V	3	VLM3612C/850	VPL100-4C	<20%
VEKM-L33C/850	3 lamp, 3ft 5000K	Normal Wattage	D547-3M-303 C/850	40.5	6050	149.3827160493827	5000	83	120-277V	3	VLM3612C/850	VPL100-4C	<20%
VEKM-L33C/850	3 lamp, 3ft 5000K	High Wattage	D547-3M-303 C/850	46	6625	144.0217391304348	5000	83	120-277V	3	VLM3612C/850	VPL100-4C	<20%
VEKM-L33C/850	3 lamp, 3ft 5000K	Low Wattage	D547-3M-303 C/850	31.5	4150	132	5000	83	3	VLM3612C/850	VPL100-4C	<20%	
VEKM-L33C/850	3 lamp, 3ft 5000K	Normal Wattage	D547-3M-303 C/850	38	5000	132	5000	83	3	VLM3612C/850	VPL100-4C	<20%	
VEKM-L33C/850	3 lamp, 3ft 5000K	High Wattage	D547-3M-303 C/850	46	6100	133	5000	83	3	VLM3612C/850	VPL100-4C	<20%	


Module Dimensions:



Driver Dimensions:

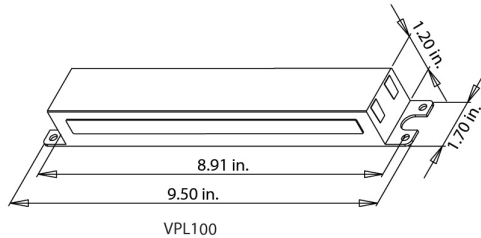

Wiring Diagram:

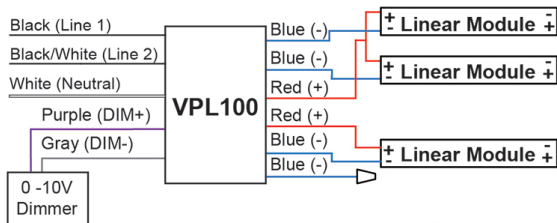

Output Current Selection

Input Line	Output Current
L1 (BLK)	300mA
L2 (BLK/WHT)	250mA
L1 + L2	360mA

DLC Listing:

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L33C/850	D547-3M-303 C/850	Low Wattage	N/A	N/A	N/A
VEKM-L33C/850	D547-3M-303 C/850	Normal Wattage	N/A	N/A	N/A
VEKM-L33C/850	D547-3M-303 C/850	High Wattage	N/A	N/A	N/A
VEKM-L33C/850	D547-3M-303 C/850	Low Wattage	N/A	N/A	N/A
VEKM-L33C/850	D547-3M-303 C/850	Normal Wattage	N/A	N/A	N/A
VEKM-L33C/850	D547-3M-303 C/850	High Wattage	N/A	N/A	N/A

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.