

# VersaKit Linear Retrofit Kit

## VEKM-L42C/840

### Commercial Grade LED Retrofit Kit



#### Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


#### Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015


#### Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L42C/840	2 lamp, 4ft 4000K	Low Wattage	D546-2M-304 C/840	23.5	3600	153.1914893617021	4000	84	120-277V	2	VLM4813C/840	VPL50-2C	<20%
VEKM-L42C/840	2 lamp, 4ft 4000K	Normal Wattage	D546-2M-304 C/840	28.5	4375	153.5087719298245	4000	84	120-277V	2	VLM4813C/840	VPL50-2C	<20%
VEKM-L42C/840	2 lamp, 4ft 4000K	High Wattage	D546-2M-304 C/840	35	5050	144.2857142857143	4000	84	120-277V	2	VLM4813C/840	VPL50-2C	<20%
VEKM-L42C/840	2 lamp, 4ft 4000K	Low Wattage	D546-2M-304 C/840	23	3150	137	4000	84	2	VLM4813C/840	VPL50-2C	<20%	
VEKM-L42C/840	2 lamp, 4ft 4000K	Normal Wattage	D546-2M-304 C/840	27	3700	137	4000	84	2	VLM4813C/840	VPL50-2C	<20%	
VEKM-L42C/840	2 lamp, 4ft 4000K	High Wattage	D546-2M-304 C/840	35	4600	131	4000	84	2	VLM4813C/840	VPL50-2C	<20%	


### Module Dimensions:



### Driver Dimensions:

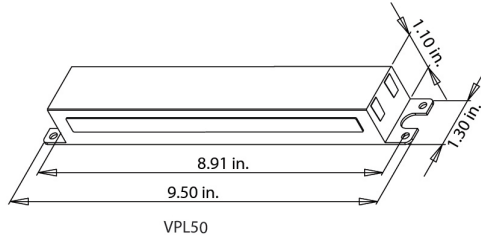

### Wiring Diagram:

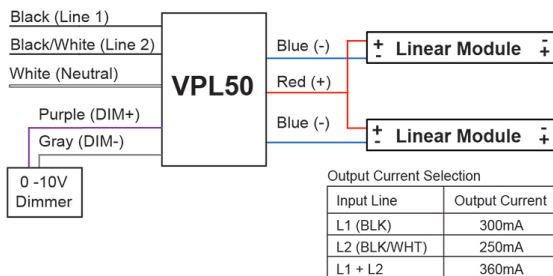

### DLC Listing:

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L42C/840	D546-2M-304 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L42C/840	D546-2M-304 C/840	Normal Wattage	PQS4M6NF	D546-2M-304 C/840 L	5
VEKM-L42C/840	D546-2M-304 C/840	High Wattage	N/A	N/A	N/A
VEKM-L42C/840	D546-2M-304 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L42C/840	D546-2M-304 C/840	Normal Wattage	PQS4M6NF	D546-2M-304 C/840 L	5
VEKM-L42C/840	D546-2M-304 C/840	High Wattage	N/A	N/A	N/A

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

