

# VersaKit Linear Retrofit Kit

## VEKM-L43C/840

### Commercial Grade LED Retrofit Kit



#### Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


#### Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015


#### Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L43C/840	3 lamp, 4ft 4000K	Low Wattage	D547-3M-304 C/840	35.5	5450	153.5211267605634	4000	83	120-277V	3	VLM4813C/840	VPL100-4C	<20%
VEKM-L43C/840	3 lamp, 4ft 4000K	Normal Wattage	D547-3M-304 C/840	42.5	6525	153.5294117647059	4000	83	120-277V	3	VLM4813C/840	VPL100-4C	<20%
VEKM-L43C/840	3 lamp, 4ft 4000K	High Wattage	D547-3M-304 C/840	50	7225	144.5	4000	83	120-277V	3	VLM4813C/840	VPL100-4C	<20%
VEKM-L43C/840	3 lamp, 4ft 4000K	Low Wattage	D547-3M-304 C/840	33	4680	142	4000	83	3	VLM4813C/840	VPL100-4C	<20%	
VEKM-L43C/840	3 lamp, 4ft 4000K	Normal Wattage	D547-3M-304 C/840	39	5550	142	4000	83	3	VLM4813C/840	VPL100-4C	<20%	
VEKM-L43C/840	3 lamp, 4ft 4000K	High Wattage	D547-3M-304 C/840	50	6900	138	4000	83	3	VLM4813C/840	VPL100-4C	<20%	


**Module Dimensions:**



**Driver Dimensions:**

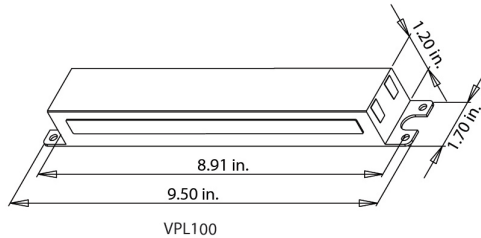

**Wiring Diagram:**

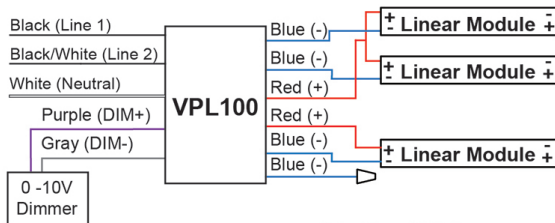

Output Current Selection

Input Line	Output Current
L1 (BLK)	300mA
L2 (BLK/WHT)	250mA
L1 + L2	360mA

**DLC Listing:**

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L43C/840	D547-3M-304 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L43C/840	D547-3M-304 C/840	Normal Wattage	N/A	N/A	N/A
VEKM-L43C/840	D547-3M-304 C/840	High Wattage	N/A	N/A	N/A
VEKM-L43C/840	D547-3M-304 C/840	Low Wattage	N/A	N/A	N/A
VEKM-L43C/840	D547-3M-304 C/840	Normal Wattage	N/A	N/A	N/A
VEKM-L43C/840	D547-3M-304 C/840	High Wattage	N/A	N/A	N/A

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.