

# VersaKit Linear Retrofit Kit

## VEKM-L44C/850

### Commercial Grade LED Retrofit Kit



#### Descriptions:

The UL 1598C Classified LED retrofit kits with linear modules are perfect for any linear applications such as troffer, wraparound, strips, etc. Aluminum backing provides the best heatsink so it can fit for severe working conditions. Paired drivers offer power selection and 0-10V dimmability for most versatility. The linear retrofit kit are an one-fits-all solution.


#### Features & Benefits:

- UL 1598C Classified LED retrofit kits with linear modules, for any linear applications such as troffer, wraparound, strips, etc.
- Driver + Module kits, no lamp socket needed
- Magnet on the back for easy installation
- UL 1598C Classified Retrofit Kits
- UL Class 2 Low Voltage System
- 3 Steps MacAdam Steps for Accurate Color
- Long life 50,000 hours
- 5 Years Warranty of Whole System
- Universal Input 120/277V
- 0-10V Dimming
- Optional Nano Plastic Lens for NSF 2 Qualified Applications
- Aluminum backing for heatsink, independent to Fixtures
- True Multi Channel Operation
- Programmable with Multiple Light Levels
- Flicker-free, Meets IEEE 1798-2015


#### Specifications:

Ordering Code	Applicatio	Mode	Kit Model	System Wattage	System Lumens	System Efficacy	CCT	CRI	Input Voltage	Module Qty	Module	Driver	THD
VEKM-L44C/850	4 lamp, 4ft 5000K	Low Wattage	D547-4M-304 C/850	47	7250	154.2553191489362	5000	83	120-277V	4	VLM4813C/850	VPL100-4C	<20%
VEKM-L44C/850	4 lamp, 4ft 5000K	Normal Wattage	D547-4M-304 C/850	57	8775	153.9473684210526	5000	83	120-277V	4	VLM4813C/850	VPL100-4C	<20%
VEKM-L44C/850	4 lamp, 4ft 5000K	High Wattage	D547-4M-304 C/850	65	9375	144.2307692307692	5000	83	120-277V	4	VLM4813C/850	VPL100-4C	<20%
VEKM-L44C/850	4 lamp, 4ft 5000K	Low Wattage	D547-4M-304 C/850	42	6200	147	5000	83	4	VLM4813C/850	VPL100-4C	<20%	
VEKM-L44C/850	4 lamp, 4ft 5000K	Normal Wattage	D547-4M-304 C/850	51	7400	145	5000	83	4	VLM4813C/850	VPL100-4C	<20%	
VEKM-L44C/850	4 lamp, 4ft 5000K	High Wattage	D547-4M-304 C/850	65	9250	142	5000	83	4	VLM4813C/850	VPL100-4C	<20%	


### Module Dimensions:



### Driver Dimensions:

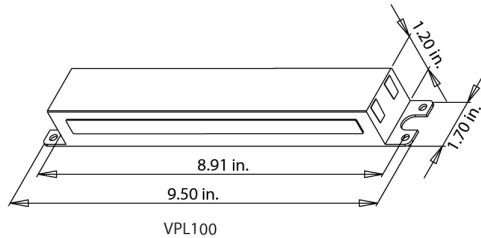

### Wiring Diagram:

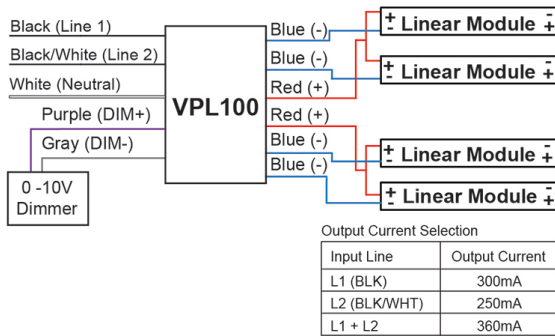

### DLC Listing:

Ordering Code	DLC Model	Mode	DLC Product ID	DLC Product Model	DLC Version
VEKM-L44C/850	D547-4M-304 C/850	Low Wattage	N/A	N/A	N/A
VEKM-L44C/850	D547-4M-304 C/850	Normal Wattage	PG9SV4YT	D547-4M-304 C/850 L	5
VEKM-L44C/850	D547-4M-304 C/850	High Wattage	P0WESRAG	D547-4M-304 C/850 H	5
VEKM-L44C/850	D547-4M-304 C/850	Low Wattage	N/A	N/A	N/A
VEKM-L44C/850	D547-4M-304 C/850	Normal Wattage	PG9SV4YT	D547-4M-304 C/850 L	5
VEKM-L44C/850	D547-4M-304 C/850	High Wattage	P0WESRAG	D547-4M-304 C/850 H	5

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.

