

# WL Outdoor LED Drivers

## VEL150XXXMVHB-36

### Constant Current



### Descriptions:

The WL series of outdoor LED drivers offer the perfect power to fixtures in any severe environment. Accurate constant current design keep the performance with high efficiency. Metal housing provides best heatsinking to guarrantee the long life operation.


### Features & Benefits:

- Universal Voltage (120-277V)
- Outdoor
- Constant Current
- 0-10V Dimming
- Integrates with Adaptive Lighting Control Systems
- Compatible with LED modules
- UL, cUL, UL8750 Class 2
- FCC Part 15 Class A
- Operating Temperature: -22°F to 122°F
- Storage Temperature: -40°F to 131°F

### Specifications:


Ordering Code	Max Output Power	Max Output Voltage	Output Current (mA)	Input Voltage	Power Factor	Min Starting Temp (C)	Dimming	System Efficacy	IP Rating
VEL150070MVHB-36	150	129-214	700	120-277	>0.90	-40	None	91/93	IP67
VEL150140MVHB-36	150	64-107	1400	120-277	>0.90	-40	None	90.5/92.5	IP67
VEL150210MVHB-36	150	43-71	2100	120-277	>0.90	-40	None	90/92	IP67
VEL150280MVHB-36	150	32-54	2800	120-277	>0.90	-40	None	89/91	IP67

**Dimensions:**

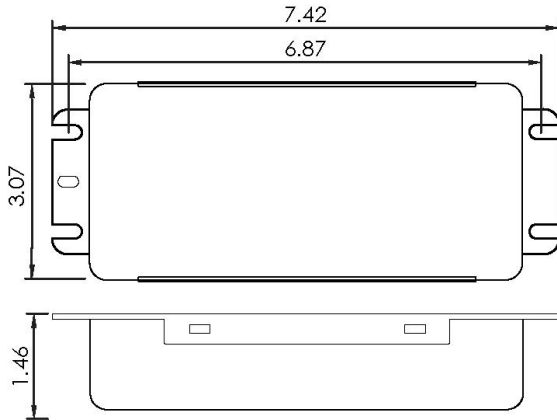

Ordering Code	Length (in)	Width (in)	Height (in)	Mounting (in)	Input Black Lead (in)	Input White Lead (in)	Output Red Lead (in)	Output Yellow Lead (in)
VEL150070MVHB-36	7.42	3.07	1.46		6	6	6	6
VEL150140MVHB-36	7.42	3.07	1.46		6	6	6	6
VEL150210MVHB-36	7.42	3.07	1.46		6	6	6	6
VEL150280MVHB-36	7.42	3.07	1.46		6	6	6	6

**Wiring Diagram:**

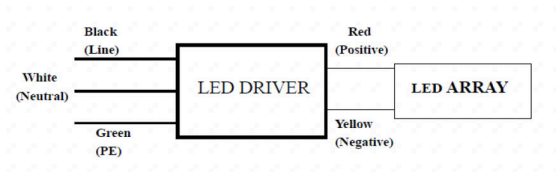

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.