

RetroFlex Driver for Type A Lamp Dimming 0-10V



Electronic Ballasts

Product Info

VEL30BN-2C-10V TAA

Family	RetroFlex Driver
Driver type	Constant Current
Lamp Operation	Series
Input Voltage	120-277V
Input Frequency	50/60Hz
Starting Method	Instant Start
Dimming	0-10V Dimming

Product Specification

Lamp Type	No. of lamps	Input Voltage (V)	Input Power (W)	Input Current (mA)	Power Factor	MAX THD (%)
L36T5HO/8xx/18G-EB-AC	1 (driver dip switch set at 240mA)	120-277V	16W	0.14@120V	>0.90	<10%
L36T5HO/8xx/18G-EB-AC	2 (driver dip switch set at 240mA)	120-277V	25W	0.22@120V	>0.90	<10%
L24T8/8XX/10G-EB	1	120-277V	15W	0.13@120V	>0.90	<10%
L24T8/8XX/10G-EB	2	120-277V	24W	0.2@120V	>0.90	<10%
L36T8/8XX/10G-EB	1	120-277V	15W	0.13@120V	>0.90	<10%
L36T8/8XX/10G-EB	2	120-277V	24W	0.2@120V	>0.90	<10%
L48T8/8XX/10G-EB	1	120-277V	16W	0.13@120V	>0.90	<10%
L48T8/8XX/10G-EB	2	120-277V	26W	0.22@120V	>0.90	<10%
L48T8/8XX/12G-EB	1	120-277V	17W	0.14@120V	>0.90	<10%
L48T8/8XX/12G-EB	2	120-277V	30W	0.25@120V	>0.90	<10%
L48T8/8XX/12G-EB-AC	1	120-277V	17W	0.14@120V	>0.90	<10%
L48T8/8XX/12G-EB-AC	2	120-277V	30W	0.25@120V	>0.90	<10%
L48T8/8XX/14G-EB	1	120-277V	18W	0.15@120V	>0.90	<10%
L48T8/8XX/14G-EB	2	120-277V	34W	0.28@120V	>0.90	<10%
L48T8/8XX/15G-EB-AC	1	120-277V	19W	0.16@120V	>0.90	<10%
L48T8/8XX/15G-EB-AC	2	120-277V	36W	0.3@120V	>0.90	<10%
L48T8/8XX/12P-EB	1	120-277V	17W	0.14@120V	>0.90	<10%
L48T8/8XX/12P-EB	2	120-277V	30W	0.25@120V	>0.90	<10%
L24T8/8XX/9G-AB	1	120-277V	15W	0.13@120V	>0.90	<10%
L24T8/8XX/9G-AB	2	120-277V	24W	0.2@120V	>0.90	<10%
L36T8/8XX/11G-AB	1	120-277V	16W	0.13@120V	>0.90	<10%
L36T8/8XX/11G-AB	2	120-277V	28W	0.23@120V	>0.90	<10%
L48T8/8XX/12G-AB	1	120-277V	17W	0.14@120V	>0.90	<10%
L48T8/8XX/12G-AB	2	120-277V	30W	0.25@120V	>0.90	<10%
LB31T8U/8XX/13P-AB	1	120-277V	18W	0.15@120V	>0.90	<10%
LB31T8U/8XX/13P-AB	2	120-277V	32W	0.27@120V	>0.90	<10%
LB48T8U6/8XX/13P-AB	1	120-277V	18W	0.15@120V	>0.90	<10%
LB48T8U6/8XX/13P-AB	2	120-277V	32W	0.27@120V	>0.90	<10%
L48T5HE/8XX/13P-EB	1 (driver dip switch set at 210mA)	120-277V	19W	0.16@120V	>0.90	<10%
L48T5HE/8XX/13P-EB	2 (driver dip switch set at 210mA)	120-277V	36W	0.3@120V	>0.90	<10%

Performance:

- Meets ANSI Standard C62.41
- Meets FCC Part 15 Class A
- Active Power Factor Correction


Safety:

- No PCB's
- UL, cUL classified
- RoHS Compliance

Applications:

- Open Circuit Voltage: 300VDC
- High Efficiency
- Min. Starting Temperature: -18C
- Max. Operating Temperature: 40C

Physical Parameters

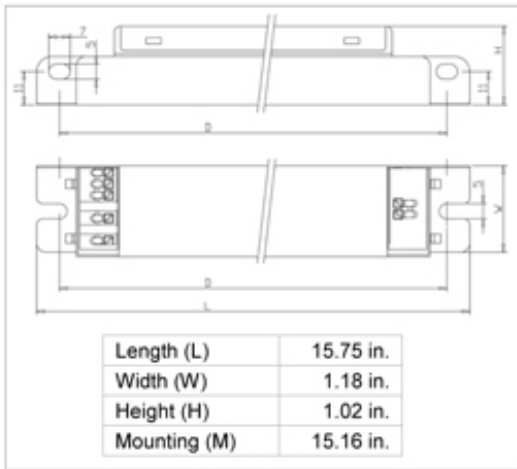

Wiring Diagram

