

CoreTech Type C Linear T8

L36T8/930/11G-XT

Commercial Grade LED T8 Lamp



Descriptions:

The CoreTech (Type C) lamps are designed to be the perfect retrofit solution to move from traditional fluorescent lamps to energy saving LEDs with best controllability. This lamp with paired driver provides full controllability with proven energy savings, long life, surge suppression and industry leading safety features. High CRI over 90 provides best color rendering.


Features & Benefits:

- 0-10V dimming (10-100%)
- No Polarity: lamp ends can be reversed
- High CRI > 90
- Same wiring as fluorescent lamp/ballast system
- UL 1598C for safety
- Full glass as fluorescent T8
- No Mercury, No UV
- Suitable for Dry and Damp Locations
- Low Temperature Operation
- Instant On
- 50,000 hours with no limitation on On/Off Cycles
- 5-year Warranty
- Evaluated for use in totally enclosed, recessed luminaires, surface mount wall and ceiling luminaires, outdoor luminaires (open surface mount luminaires with compartment protection from weather)
- For use with Class 2 driver only

Specifications:

Ordering Code	Length (in)	Lamp Current	Lamp Wattage	System Wattage	CCT (K)	Initial Lumens	CRI	Beam Angle	Lamp Efficacy	System Efficacy
L36T8/930/11G-XT	36"	250mA	9	12	3000K	1400	90	325	155	116
L36T8/930/11G-XT	36"	300mA	11	14	3000K	1600	90	325	145	115
L36T8/930/11G-XT	36"	360mA	13	15	3000K	1900	90	325	158	127

Wiring Diagram:

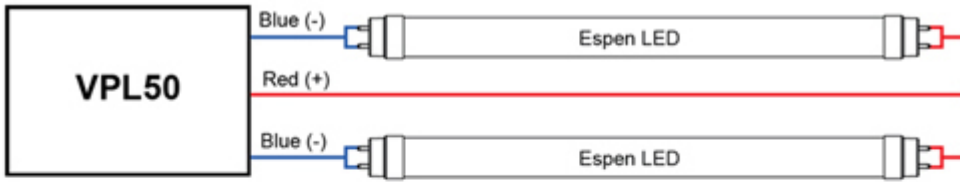

DLC Listing:

Ordering Code	DLC Product ID	DLC Product Model	DLC Version
L36T8/930/11G-XT	N/A	N/A	N/A
L36T8/930/11G-XT	N/A	N/A	N/A
L36T8/930/11G-XT	PGPJ501V	L36T8/930/11G-XT	5.1

Specification data is based on tests performed in a controlled environment and represents relative performance. Actual performance can vary depending on operating conditions. Application and performance data subject to change without notice. All specifications are nominal unless noted otherwise.